GEN 4
FF12 SURFACE MOUNT

THE FF12 SURFACE MOUNT OFFERS THE ULTIMATE PERFORMANCE WHERE A SURFACE MOUNTED UNDERWATER LIGHT IS THE ONLY OPTION.

The FF12 has a new design, higher output and built in thermo control allowing greater life and wider applications. The FF12 caters to all boats where a Thru-Hull fitting is not possible. The FF12 is a fully self contained fitting with a simple 2 wire installation. It produces both distance and width and can be mounted on any flat surface.

BRILLIANT WHITE

- Color temperature 9000 to 10000 degrees Kelvin (the colder the white the further it travels in water)
- Fixture Lumens : 2,000 lm
- Fixture Lumens Lowlight Conditions: 4,390 lm

ULTRA BLUE

- Color temperature 470nm (the color that travels further in salt water than any other)
- Fixture Lumens : 600 lm
- Fixture Lumens Lowlight Conditions : 10,460 lm

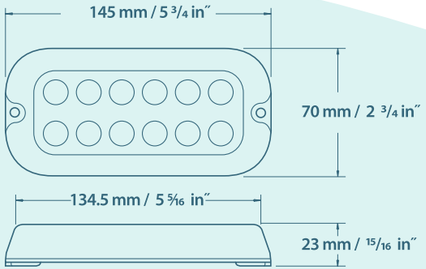

TECHNICAL SPECIFICATIONS

- Cable length 2 metres (6 feet) of tinned submersible cable
- Cable diameter 6mm/¼ inch
- Can accept 12 or 24 volt dc
- Current draw less than 2 amps @ 12 volt dc and 1 @ 24 volt dc
- High-tech polymer housing
- Reverse polarity protected
- Long life, high output 12 LED light engine
- Low cost installation
- Fitting kit contains mounting screws and drilling template
- Recommended for any vessel where thru-hull applications are not suited
- Available in Brilliant White and Ultra Blue
- 2 year warranty